


# HS-4D2



- HS-4D2 transmitter consists of
- 1 Magnetic Emergency key
  - 1 Start key
  - 1 Stop key
  - 2 Dual Step keys
  - 1 LED (2 colors)

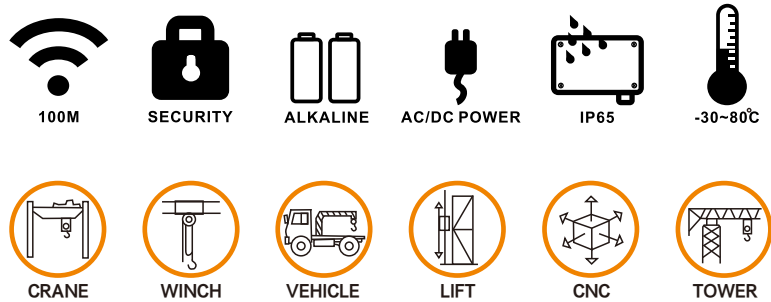

## Technical Data

Dimension (excluding antenna)	155X65X45mm
Weight (excluding batteries)	300g
Power Supply	2XAA battery
Operating Range	50~100m
Frequency	422.4 ~ 438MHz
Response Time	0.0001s
Housing Material	PA66
Protection Degree	IP65
Operating and Storage Temperature	-30°C ~ +80°C

## Receiving Unit

### HS-Rb

Dimension (excluding antenna)	200X80X70mm
Weight	860~ 940g
Power Supply	AC/DC12 ~ 24V, AC36 ~ 440V
Operating Range	50~100m
LED	1

