


# HS-6



HS-6 transmitter consists of

- 1 Start key
- 1 STOP key
- 4 Available Command keys
- 1 LED (2 colors)

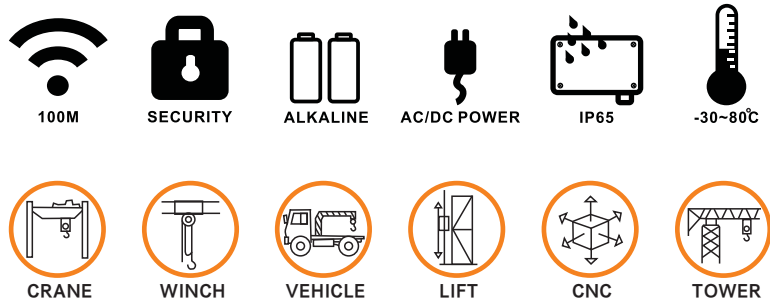

## Technical Data

Dimension (excluding antenna)	100X47X30mm
Weight (excluding batteries)	110g
Power Supply	2XAAA battery
Operating Range	50~100m
Frequency	422.4 ~ 438MHz
Response Time	0.0001s
Housing Material	PA66
Protection Degree	IP65
Operating and Storage Temperature	-30°C ~ +80°C

## Receiving Unit

### HS-Ra

Dimension (excluding antenna)	130X95X52mm
Weight	500~ 550g
Power Supply	AC/DC12 ~ 24V, AC36 ~ 440V
Operating Range	50~100m
LED	1

