


HS-8D6



- HS-8D6 transmitter consists of
- 1 Magnetic Emergency key
 - 1 Start key
 - 1 Stop key
 - 6 Dual Step keys
 - 1 LED (2 colors)

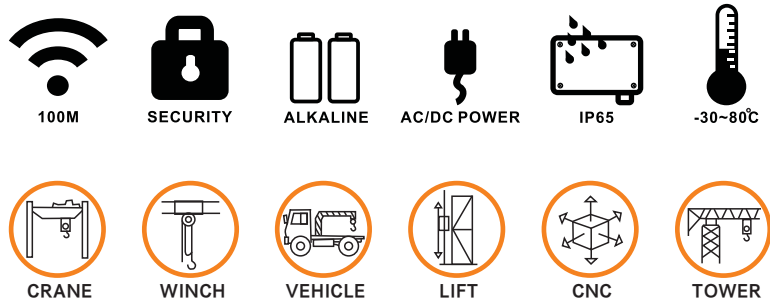

Technical Data

| | |
|-----------------------------------|----------------|
| Dimension (excluding antenna) | 155X65X45mm |
| Weight (excluding batteries) | 320g |
| Power Supply | 2XAA battery |
| Operating Range | 50~100m |
| Frequency | 422.4 ~ 438MHz |
| Response Time | 0.0001s |
| Housing Material | PA66 |
| Protection Degree | IP65 |
| Operating and Storage Temperature | -30°C ~ +80°C |

Receiving Unit

HS-Rc

| | |
|-------------------------------|----------------------------|
| Dimension (excluding antenna) | 225X195X70mm |
| Weight | 1800~2500g |
| Power Supply | AC/DC12 ~ 24V, AC36 ~ 440V |
| Operating Range | 50~100m |
| LED | 1 |

